


## Mobile Floor Scale **NC series**


- ◆ Design like NA series floor scale, but can move with four castors.
- ◆ Four alloy tool steel potted load cells.
- ◆ Deluxe stainless steel indicator as standard.
- ◆ Two slopes are fixed to the platform as standard.
- ◆ Supplied flat-pack for easy assembly.

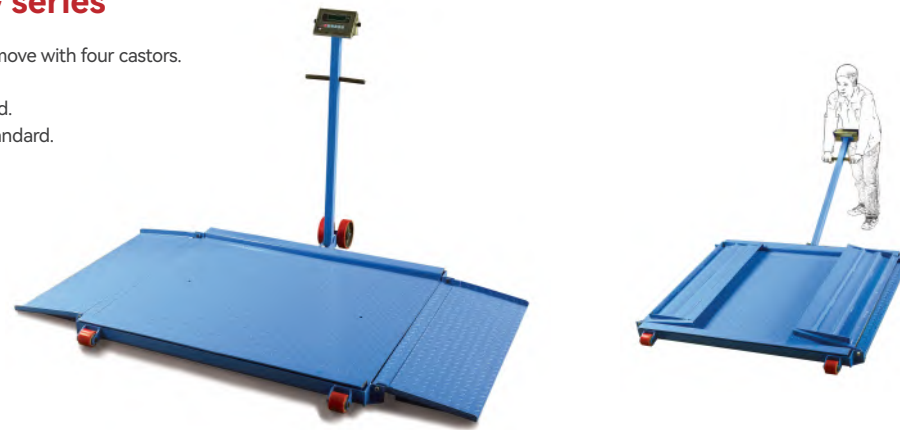

Model	NC1000A	NC1000B	NC1000C	NC1500A	NC1500B	NC1500
Measuring Range (kg)	1000	1000	1000	1500	1500	1500
Indexing Accuracy (kg)	0.5	0.5	0.5	0.5	0.5	0.5
Sensor Capacity (kg)	1000	1000	1000	2000	2000	2000
Sensor Number	4	4	4	4	4	4
Platform Size (mm)	1000×1000	1000×1200	1500×1500	1000×1000	1000×1200	1500×1500
Overall Size With Slopes (mm)	2000×1300	2000×1500	2500×1800	2000×1300	2000×1500	2500×1800
Height (mm)	60	60	60	60	60	60
Net Weight (kg)	180	200	280	180	200	280

## “U” Table Scale **ND series**


- ◆ “U” shaped top platform.
- ◆ “U” shaped table scale are special for handling pallets, no need for a pit or load ramps.
- ◆ Suitable for weighing in warehouse, storehouse.
- ◆ Light net weight, easy to move for one person, with two wheels.
- ◆ Four alloy tool steel potted load cells.
- ◆ Deluxe stainless steel indicator as standard.

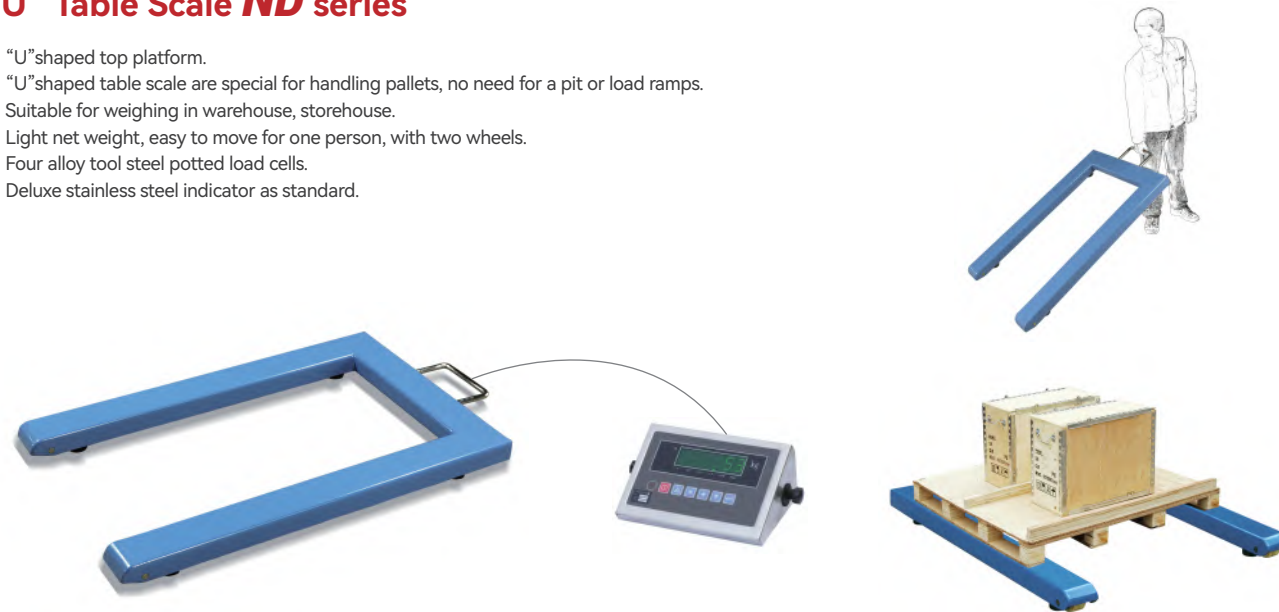

Model	ND500	ND1000	ND2000	ND3000	ND5000
Measuring Range (kg)	500	1000	2000	3000	5000
Indexing Accuracy (kg)	0.5	1	2	3	5
Sensor Capacity (kg)	500	1000	2000	2000	2500
Sensor Number	4	4	4	4	4
Resolution Step (kg)	4	10	20	20	40
Height (mm)	120	120	120	120	120
Net Weight (kg)	38	38	38	38	45

## Digital Load Indicators **ID series**

- ◆ The load indicator is a mechanical measuring instrument with electronic display.
- ◆ Whether used as a conventional crane scale or to measure forces, it is the economical choice for various applications. It can be used in conjunction with shackles and hooks.
- ◆ The load indicator is provided with liquid crystal display (LCD) which can tare as well as show either the gross or the net load.
- ◆ It also indicates the overload protection at 110% of the gross weight and the status of the battery.
- ◆ Conforms to CE safety standard.

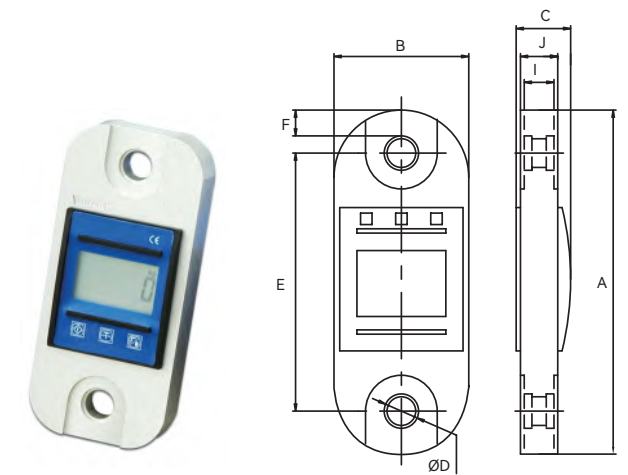

Model	ID250	ID500	ID1000	ID2000	ID3200	ID6400	
Max. Capacity (lbs/kg)	550 / 250	1100 / 500	2200 / 1000	4400 / 2000	7000 / 3200	14000 / 6400	
Precision (lbs/kg)	4 / 2	8 / 4	16 / 8	30 / 15	50 / 25	100 / 50	
Indexing Accuracy (lbs/kg)	1 / 0.5	2 / 0.9	2 / 0.9	10 / 4.5	10 / 4.5	20 / 9	
Test Capacity (lbs/kg)	1100 / 500	2200 / 1000	4400 / 2000	8800 / 4000	14000 / 6400	28000 / 12800	
Net Weight (lbs/kg)	1.1 / 0.5	1.1 / 0.5	1.1 / 0.5	1.3 / 0.6	1.5 / 0.7	2.3 / 1	
Figure Dimension (inch/mm)	A	8 <sup>5</sup> / <sub>8</sub> / 220	8 <sup>5</sup> / <sub>8</sub> / 220	8 <sup>5</sup> / <sub>8</sub> / 220	9 <sup>3</sup> / <sub>16</sub> / 233	9 <sup>9</sup> / <sub>16</sub> / 234	10 <sup>13</sup> / <sub>16</sub> / 274
	B	3 <sup>9</sup> / <sub>16</sub> / 89.9	3 <sup>9</sup> / <sub>16</sub> / 89.9	3 <sup>9</sup> / <sub>16</sub> / 89.9	3 <sup>9</sup> / <sub>16</sub> / 89.9	3 <sup>13</sup> / <sub>16</sub> / 96.8	4 <sup>1</sup> / <sub>2</sub> / 114.8
	C	1 <sup>5</sup> / <sub>8</sub> / 41.9	1 <sup>5</sup> / <sub>8</sub> / 41.9	1 <sup>5</sup> / <sub>8</sub> / 41.9	1 <sup>7</sup> / <sub>8</sub> / 48.0	1 <sup>7</sup> / <sub>8</sub> / 48.0	1 <sup>7</sup> / <sub>8</sub> / 48.0
	ØD	9 <sup>1</sup> / <sub>16</sub> / 14.0	9 <sup>1</sup> / <sub>16</sub> / 14.0	9 <sup>1</sup> / <sub>16</sub> / 14.0	7 <sup>1</sup> / <sub>8</sub> / 21.8	7 <sup>1</sup> / <sub>8</sub> / 21.8	1 <sup>1</sup> / <sub>8</sub> / 27.9
	E	7 <sup>3</sup> / <sub>4</sub> / 195.8	7 <sup>3</sup> / <sub>4</sub> / 195.8	7 <sup>3</sup> / <sub>4</sub> / 195.8	8 <sup>1</sup> / <sub>8</sub> / 207.0	8.15 / 207.0	8 <sup>9</sup> / <sub>16</sub> / 216.9
	F	1 <sup>1</sup> / <sub>2</sub> / 11.9	1 <sup>1</sup> / <sub>2</sub> / 11.9	1 <sup>1</sup> / <sub>2</sub> / 11.9	1 <sup>1</sup> / <sub>2</sub> / 12.7	3 <sup>1</sup> / <sub>4</sub> / 18.0	1 <sup>1</sup> / <sub>8</sub> / 29
	G	1 <sup>7</sup> / <sub>16</sub> / 31.5	1 <sup>7</sup> / <sub>16</sub> / 31.5	1 <sup>7</sup> / <sub>16</sub> / 31.5	1 <sup>13</sup> / <sub>16</sub> / 45.0	1 <sup>3</sup> / <sub>4</sub> / 45.0	2 <sup>1</sup> / <sub>8</sub> / 54.1
	I	5 <sup>5</sup> / <sub>8</sub> / 15.7	5 <sup>5</sup> / <sub>8</sub> / 15.7	5 <sup>5</sup> / <sub>8</sub> / 15.7	1 / 25.4	1 / 25.4	1 / 25.4
	J	11 <sup>1</sup> / <sub>16</sub> / 26.9	11 <sup>1</sup> / <sub>16</sub> / 26.9	11 <sup>1</sup> / <sub>16</sub> / 26.9	15 <sup>5</sup> / <sub>16</sub> / 33.0	15 <sup>5</sup> / <sub>16</sub> / 33.0	15 <sup>5</sup> / <sub>16</sub> / 33.0

## Crane Scale **CW series**

- ◆ A compact measuring device for weighing loads during lifting.
- ◆ Appropriate tackle can be attached to assist in the lifting and weighing.
- ◆ The crane weighers have a liquid crystal display (LCD), which can tare as well as show either the gross or net loads.
- ◆ It also indicates the load protection at 110% of the gross weight and the status of the battery.
- ◆ Conforms to CE safety standard.



Model	CW05	CW10	CW20	CW30	CW50	CW100	CW150	CW200
Measuring Range (tonne)	0-0.5	0-1	0-2	0-3	0-5	0-10	0-15	20
Indexing Accuracy (kg)	0.2	0.5	1	1	2	5	5	5
Resolution Step (kg)	10	10	20	20	40	100	100	100
Dimension	A (mm)	315	315	315	315	355	355	355
	B (mm)	430	430	430	430	570	650	760
	C (mm)	540	540	540	540	710	820	1000
Net Weight (kg)	5	11	11	15	21	50	58	60