


Counterbalanced working positioner **EC** series



| Model                    | EC1017                   | EC1515        |
|--------------------------|--------------------------|---------------|
| Type                     | Electric                 |               |
| Capacity (kg)            | 100                      | 150           |
| Load Center (mm)         | 235                      |               |
| Max. Fork Height (mm)    | 1700                     | 1500          |
| Min. Fork Height (mm)    | 135                      |               |
| Platform Size (mm)       | 605×475                  |               |
| Overall Size (mm)        | 1055×605×2010            | 1055×605×1810 |
| Load Wheel Dia. (mm)     | 75                       |               |
| Steering Wheel Dia. (mm) | 125                      |               |
| Battery                  | 2×12V/12Ah               |               |
| Charger                  | 24V/2A                   |               |
| Control                  | PCB/Up-down limit switch |               |

Semi-Electric Stacker **ERL** series with JIB & Platform

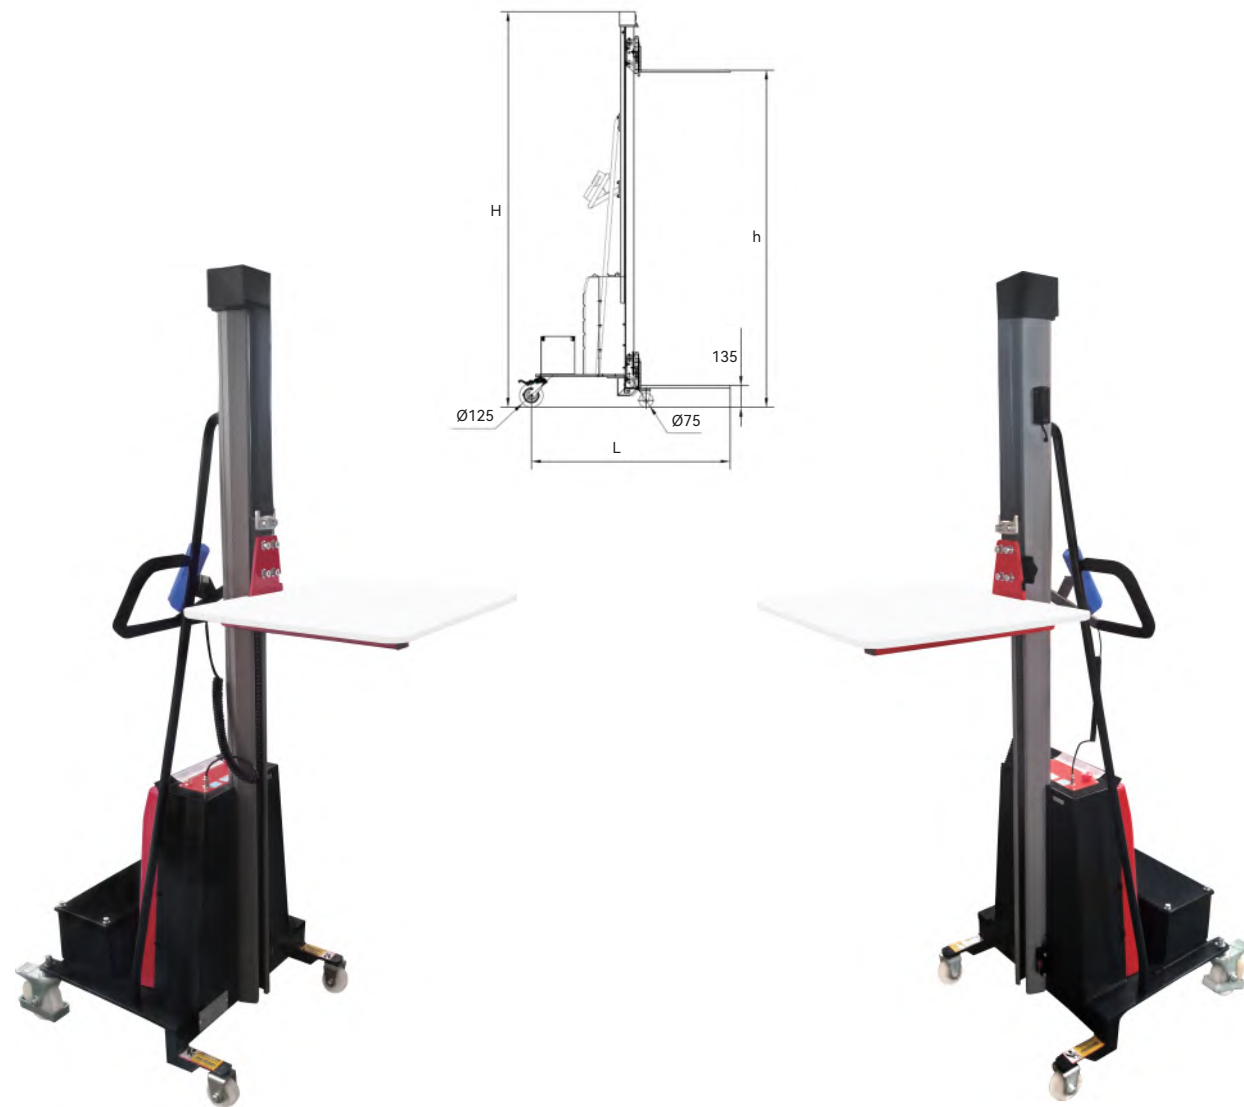

| Model            | ERL1023-JIB   |             |
|------------------|---------------|-------------|
| Capacity         | Beam-JIB (kg) | 100-400     |
|                  | Platform (kg) | 500         |
| Max. Beam Length | (mm/inch)     | 1651/61     |
| Platform Size    | (mm)          | 600×470     |
| Max. JIB Height  | (mm/inch)     | 2235/88     |
| Battery          |               | 12V-85Ah    |
| Charger          |               | 12V-10A     |
| Power Pack       | (mm)          | 12V-800W DC |
| Steering Wheel   | (inch)        | PU, 6"      |
| Net Weight       | (kg)          | 360         |

Mini Winch Stacker **PM** series

- ◆ Light weight design, very easy to operate by hand winch.
- ◆ Suitable for super market, office, warehouse, narrow area, ect.
- ◆ Adjustable fork.

| Model                      | PM120              |
|----------------------------|--------------------|
| Capacity (kg)              | 120                |
| Lifting Height (mm)        | 1050               |
| Min. Fork Height (mm)      | 95                 |
| Fork Length (mm)           | 400                |
| Individual Fork Width (mm) | 50                 |
| Fork Width (mm)            | Adjustable 345-485 |
| Load Wheel (mm)            | Ø50×20             |
| Steering Wheel (mm)        | Ø200/50-140        |
| Net Weight (kg)            | 31                 |

