


## Four Scissor Lift Table **HF** series

- ◆ Heavy duty design.
- ◆ High quality power unit from Europe.
- ◆ Conforms to EN1570 and ANSI/ASME safety standard.
- ◆ Safety clearance between scissors to prevent from trapping.
- ◆ Installed aluminum safety bar to prevent from trapping while descending.
- ◆ Built-in relief valve and compensation flow control valve to fulfill overload protection and control lowering speed.
- ◆ There is safety valve to stop the table or keep slow descending in case of hose burst.
- ◆ Self-lubricating bushing in all pivot points to prolong the lifespan.

Model		HF400	HF800	HF1600	HF2000
Capacity	(kg)	400	800	1600	2000
Min. Height	(mm)	600	710	800	950
Max. Height	(mm)	4100	4100	4250	4800
Platform Size	(mm)	1700×1000	1700×1000	1700×1200	2000×1200
Base Size	(mm)	1600×1000	1606×1010	1610×1140	2000×1200
Raising Time	(s)	30~40	75~85	50~65	90~95
Descending Time	(s)	30~40	75~85	70~85	75~80
Power Pack		AC380V, 2.2KW	AC380V, 2.2KW	AC380V, 2.2KW	AC380V, 3KW
Net Weight	(kg)	457	530	725	920

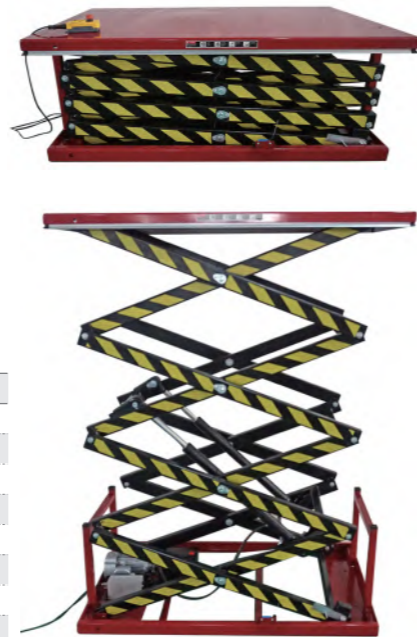

## Mini Lift Table **HZ** series

- ◆ Small platform for special size materials.
- ◆ Meet EN1570 norm and ANSI/ASME safety standard.
- ◆ High quality power unit made in Europe.

Model		HZ0501	HZ1001
Capacity	(kg)	500	1000
Lowered Height	(mm)	165	180
Raised Height	(mm)	950	770
Platform Size	LxW (mm)	610×910	610×916
Base Frame Size	(mm)	450×700	585×896
Lift Time	(sec)	17~22	15~20
Power Pack		380V/50HZ, AC 0.75kw	380V/50HZ, AC 1.1kw
Net Weight	(kg)	98	115



## Large Lift Table **HW** series

- ◆ Large platform for special size materials.
- ◆ Meet EN1570 norm and ANSI/ASME safety standard.
- ◆ High quality power unit made in Europe.

Model		HW500L	HW501	HW502
Capacity	(kg)	500	500	500
Lowered Height	(mm)	200	180	180
Raised Height	(mm)	1000	1000	1000
Platform Size	LxW (mm)	800×2000 (standard)	1300×600	1300×800
Base Frame Size	(mm)	680×1615	1210×585	1210×585
Lift Time	(sec)	20~25	20~25	20~25
Power Pack		380V/50HZ, AC 1.1kw	380V/50HZ, AC 0.75KW	380V/50HZ, AC 0.75KW
Net Weight	(kg)	218	121	131



## Large Lift Table **HW-D** series

- ◆ Large platform for special size materials.
- ◆ Heavy duty design.
- ◆ Meet EN1570 norm and ANSI/ASME safety standards.
- ◆ These models can be used in above-floor or in-floor pit applications.

### Standard Safety Features

- ◆ Upper platform lifted with aluminum safety bar preventing descent on contact with obstructions.
- ◆ Low-tention (24V) control box with up-down buttons and compensated flow valve for controlled lowering speed.
- ◆ Heavy duty cylinders with drainage system and check valve to stop the lift table lowering in case of hose burst.
- ◆ Safety clearance between scissors to prevent trapping during operation.

### Other Standard Features

- ◆ Self lubricating bushings on pivot points.
- ◆ Removable lifting eye to facilitate handling and lift table installation.
- ◆ High quality AC power packs are made in Europe.




HW2000D

Model		HW2000D	HW4000D	HW8000D
Capacity	(kg)	2000	4000	8000
Lowered Height	(mm)	205	230	240
Raised Height	(mm)	1000	1000	1000
Platform Size	LxW (mm)	2500×820	2500×850	3000×1200
Base Frame Size	(mm)	2460×640	2450×785	2970×930
Lift Time	(s)	40~45	30~40	35~45
Power Pack		380V/50Hz, AC1.1kw	380V/50Hz, AC2.2kw	380V/50Hz, AC2.2kw
Net Weight	(kg)	265	360	705

## Electric Scissor Lift Table **HIW** series

- ◆ Scissor frame: solid steel plate.
- ◆ Compact & heavy duty.



Model		HIW05	HIW10	HIW20	HIW30
Capacity	(kg)	500	1000	2000	3000
Lowered Height	(mm)	190	190	190	220
Raised Height	LxB (mm)	1010	1010	1010	1020
Platform Size	(mm)	1300×800	1300×800	1300×800	1300×800
Lift Time	(s)	15	25	40	26
Lifting Speed (laden / unladen)	(mm/s)	55	40	22	30
Lowering Speed (laden / unladen)	(mm/s)	40	35	33	40
Power	(Kw)	0.75	0.75	0.75	1.5
Net Weight	(kg)	160	220	280	320

