


C. Ratchet Beam Jacks TJ series


- ◆ Ratchet screw design, reversible.
- ◆ Reflective collar and safety yellow painting.

Model	TJ60	TJ60A	TJ60H
Service Range (inch)	39 ¹ / ₂ -51	39 ¹ / ₂ -51	39 ¹ / ₂ -47 ¹ / ₄
Static Capacity (lbs/ tonne)	100000/45	80000/36	80000/36
Lifting Capacity (lbs/ tonne)	50000/22.7	40000/18	40000/18
Cap Size	6"wide × 24"ong	6"wide × 24"ong	6"wide × 24"ong
Base Plate	15"triangular	16"triangular	16"triangular
Wheel Dia.	8"semi-pneumatic 4"emi-steel	10"solid rubber 4"emi-steel	10"solid rubber 4"emi-steel
Net Weight (lbs/ kg)	195/88.5	180/82	180/82

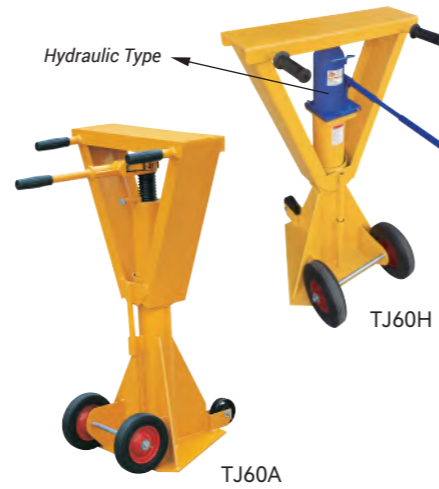


D. Economy Trailer Stabilizing Jack TJ series

- ◆ ACME threaded screw design.
- ◆ Reflective collar and safety yellow painting.

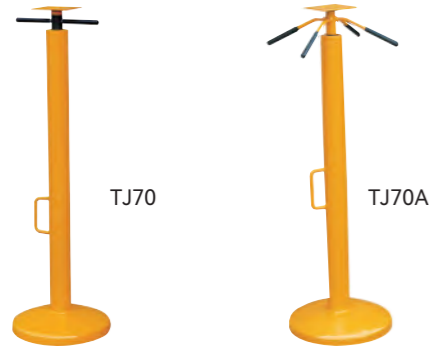

Model	TJ70	J70A
Service Range (inch)	44-51	44-51
Static Capacity (lbs/ tonne)	50000/22.7	50000/22.7
Lifting Capacity (lbs/ tonne)	5000/2.27	5000/2.27
Cap Size (inch)	5 × 5 square	5 × 5 square
Base Plate Dia. (inch)	14	14
Net Weight (lbs/ kg)	45/20.5	45/20.5

E. Jack TJ series

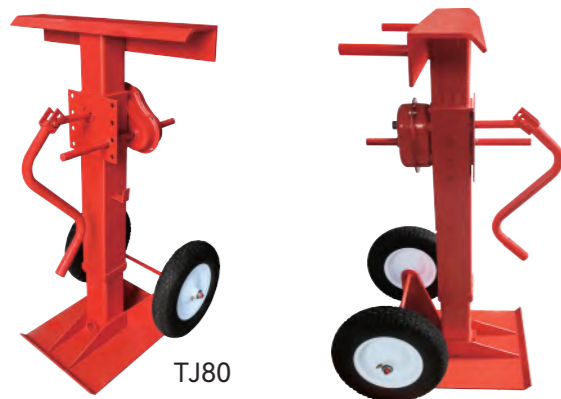

Model	TJ80
Width (inch)	30
Height (mm)	1020-1370
Static Capacity (lbs/tonne)	100000/45
Lifting Capacity (lbs/tonne)	50000/22.7
Wheel Dia. (inch/mm)	16/400

Carpet Ram, Fork Mounted CR series



Model	Pole Length	Pole Diameter	Material	Fork Pocket Size	Load Capacity
CR1-71	71"=1800mm	2 ³ / ₄ "=70mm	Steel	7 ¹ / ₂ " W × 2 ¹ / ₂ "H on 24" Center	3700lbs=1650kg
CR1-79	79"=2000mm				3300lbs=1500kg
CR1-89	89"=2250mm				3000lbs=1350kg
CR1-108	108 ¹ / ₂ "=2750				2500lbs=1200kg
CR1-120	120"=3000mm				2200lbs=1000kg

Stabilising Jack JK15

- ◆ This jack will keep a trailer level when disconnected from tractor, or when it is parked on sloping ground.
- ◆ 5 positions height adjustment, 50mm per position.
- ◆ It is very easy to handle the jack by two wheels



Model	JK15
Capacity (kg)	15000
Min. Lifting Height (mm)	1070
Max. Lifting Height (mm)	1270
Adjustable Range (mm)	200
Wheel, Rubber (mm)	200×50
Support Length (mm)	1200
Total Length (mm)	1750
Total Width (mm)	595
Net Weight (kg)	86