

Hand Winch **WH** series


- ◆ Suitable for many lifting and lowering applications such as raising boats on davits or raising and lowering sailboat keels.
- ◆ Self-locking brake winches provide additional safety and control for many lifting and pulling jobs.
- ◆ The automatic friction brake supplies constant, positive holding action and prevents runaway load. Without wire rope.
- ◆ Brake is fully automatic and the load remains in position anytime the handle is released.





Model	WH06	WH08	WH10	WH12	WH14	WH16	WH18	WH20	WH25
W.L.L (lbs)	600	800	1000	1200	1400	1600	1800	2000	2500
Cable	4.2mm×10m	4.5mm×10m	4.5mm×10m	4.8mm×10m	4.8mm×10m	5.0mm×10m	5.1mm×10m	5.1mm×10m	5.6mm×10m
Gear Ratio	3:1	3:1	3.4:1	3.4:1	3.4:1	4:1	4:1/8:1	4:1/8:1	4:1/8:1
Net Weight (kg)	17	17	19	19	22	17	20	21	23

Worm Gear **WHC** series

- ◆ Worm gear winch is built for multi-purpose hauling and pulling operations that require a positive mechanism for breaking that cannot accidentally run free.
- ◆ It is not recommended for lifting applications.
- ◆ It is not to be used as hoists for lifting, supporting, or transporting people or for loads over areas where people could be present.

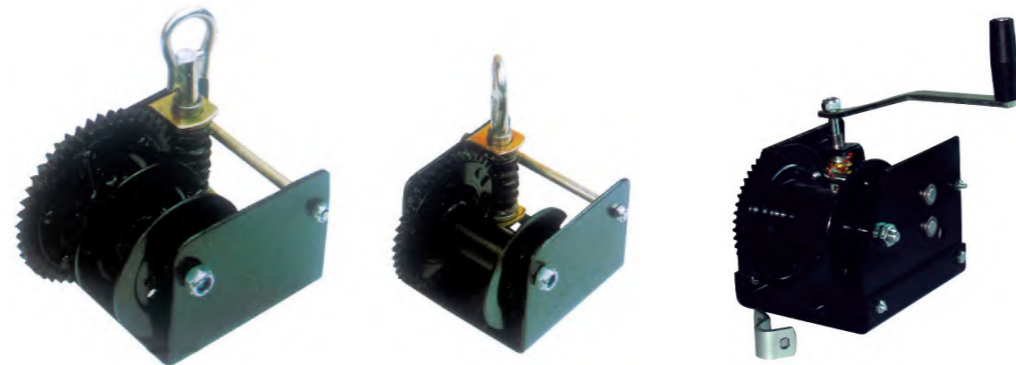

Model	Rated Pull (lbs /kg)	Cable Size		Gear Ratio	Module (mm)	Handle Length (mm)	Drum-Hub Dia. (mm)
		Dia. (mm)	Length (m)				
WHC15	2500 / 680	Ø4.8	15	31:1	3	280	Ø38
WHC20	2000 / 900	Ø5.0	15	41:1	3	280	Ø38
WHC25	2500 / 1100	Ø5.6	30	51:1	3	280	Ø50
WHC30	3000 / 1362	Ø8.0	18	51:1	3	285	Ø80

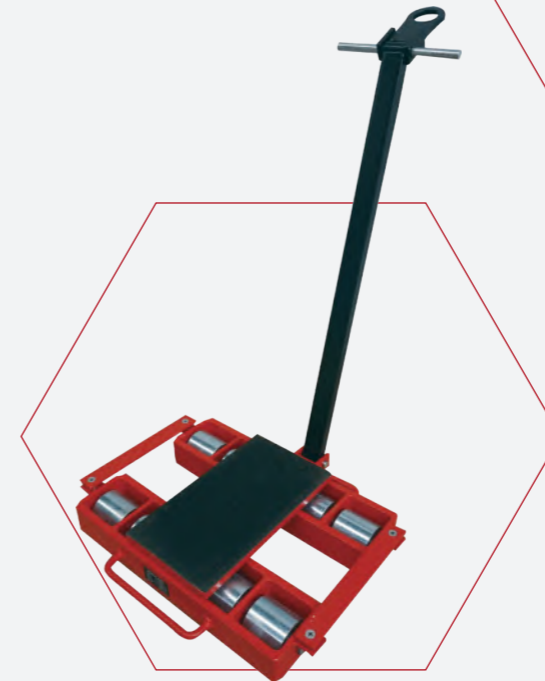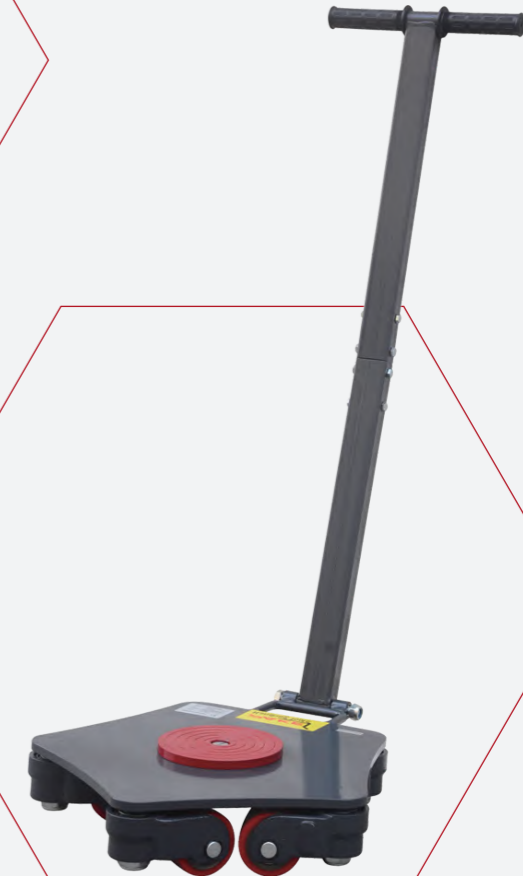

**Hand Truck/
Trolley/Cabinet
Roller Skates
Lifting Equipments
Machinery Mover & Others**