


Manual Hoist **MIN-CH** series

- ◆ Heavy duty and compact design to meet all pertinent world standard.
- ◆ Reliable disc brake and premium grade alloy load chain.
- ◆ Drop-forged and specially heat treated for great strength and durability.
- ◆ Conforms to CE safety standard.

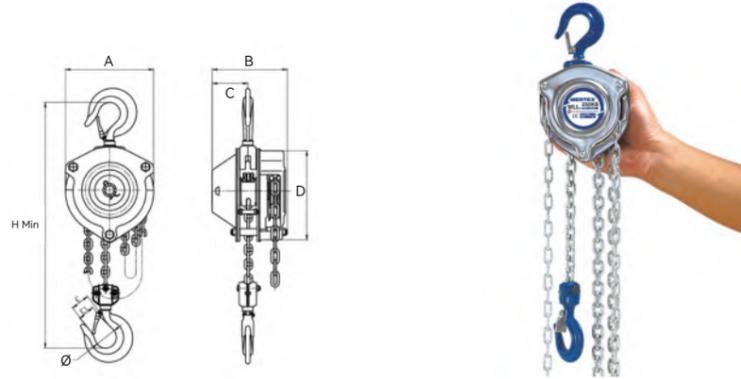

Model	Rated Load (Ton)	Standard Lift (m)	Test Load (Ton)	Min. Distance Between Hooks (mm)	Efforts Required at Capacity(kg)	No. of Load Chains	Load Chain (mm)	Major Dimensions (approx)(mm)								Net Weight (kg)	Extra Weight Per Meter of Extra List(kg)
								A	B	C	D	S	T	Ø	H Min.		
Min-CH-025	0.25	2	0.375	230	12	1	Ø4×12	100	110	48.5	109	18	15.5	25	230	3.5	0.54

Clamps for concrete pipes **PLC** series

- ◆ 2-or 3-leg
- ◆ Chain leg length 1.5m
- ◆ Safety factor 4:1



Model	Jaw Opening(mm)	Load Capacity(kg)	Weight(kg/pc)
PLC 1T	60~120	1000	10


Plain Trolleys 0.5-10 ton **HMT** series

Professional class

- ◆ Double sealed ball bearings.
- ◆ Built-in bumper guards.
- ◆ Adjustable to fit various sizes of flange and i-beams.
- ◆ Use on straight or curved track.
- ◆ Can be installed or removed at any point along the track.
- ◆ Conforms to CE safety standard.
- ◆ Conforms to ANSI/ASME safety standard.



HMT10

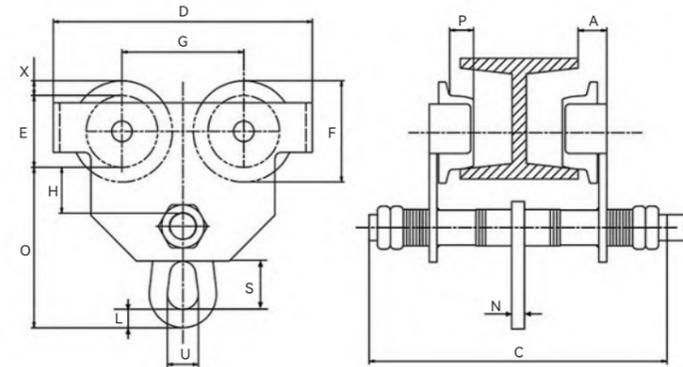

Model	HMT05	HMT10	HMT20	HMT30	HMT50	HMT100
Capacity (kg)	500	1000	2000	3000	5000	10000
Beam Flange Width b (mm)	68-126	64-140	76-165	76-203	88-203	125-203
Dimensions (mm)	O	108	115	130	164	237
	A	22	25	27	31	46
	B	20	24	27	32	38
	C	208	242	280	300	316
	D	196	236	273	320	366
	E	57	66	75	96	112
	F	78	90	105	130	150
	G	94	120	136	150	169
	H	24	20	21	31	54
	X	10.5	12	15	17	19
	P	19.5	22	24.4	30	45
	U	24	28	34	35	40
	L	10	16	17	21.5	22
N	10	12	16	16	20	
S	37	40.5	44	57.5	65	
Net Weight (kg)	7	8.7	10.4	24	36	83