

Storage Rack

- ◆ 1/8"(11-ga) steel for outdoor and indoor use;protect individuals,equipments,and inventory.Industrial yellow or orgine powder coat finish increases visibility,durability and safety.
- ◆ 1Combine as a modular system which can ne installed, removed, or expanded.

Built-On Rails (YGP-R)

- ◆ Simple to assemble and install, rails come in several lengths for custom installations.All hardware including bolts,anchors,washers,and nuts, is provided with post sections.Highly impact-resistant, triple-ridge corrugated design has no sharp edges or corners.

Steel Guard Rails And Posts


- ◆ Galvanized to resist corrosion.
- ◆ Components allow construction of single, double or triple rail system.
- ◆ Spring mounting post will flex,instead of breaking, after contact by equipment.
- ◆ Tubular posts are machined for continuous rail mounting.
- ◆ Concrete mounting kit includes 4 lag anchors.Guards bolt-to end of guard rail section and include mounting hardware.



Model	Description	Overall Length(mm)	Overall Height(mm)	Qty. Per Package
YGP-R1	1 FT bolt on rail	205	370	16
YGP-R2	2 FT bolt on rail	510	370	16
YGP-R3	3 FT bolt on rail	815	370	18
YGP-R4	4 FT bolt on rail	1120	370	18
YGP-R5	5 FT bolt on rail	1420	370	18
YGP-R6	6 FT bolt on rail	1730	370	18
YGP-R7	7 FT bolt on rail	2030	370	18
YGP-R8	8 FT bolt on rail	2340	370	18
YGP-R9	9 FT bolt on rail	2640	370	18
YGP-R10	10 FT bolt on rail	2945	370	18

Posts (YGP-P)

- ◆ Two post heights come in both inline and corner configurations for single-row(high) and double-row(high) installation.Posts are made of round corner,4" square steel tube with 1/4" thick walls and are welded to a 10" square, round corner 5/8" thick steel base plate.

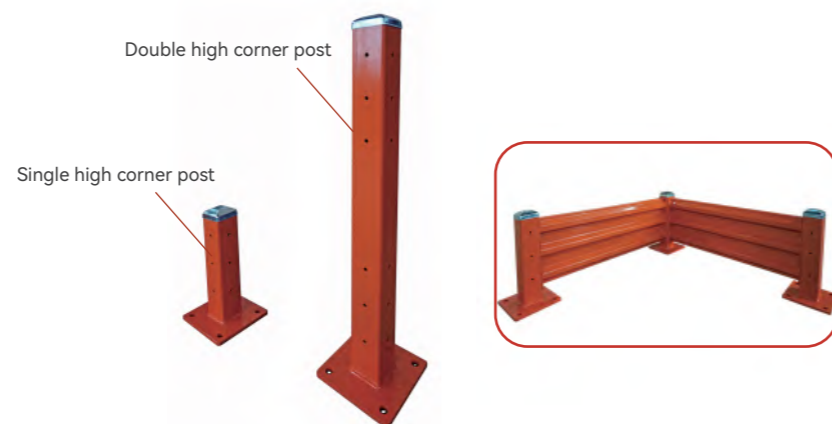

Model	Description	Overall Length(mm)	Mounting Plate Dimensionst(mm)	Qty. Per Package
YGP-P1	Single high corner post	470	250×250×16	48
YGP-P1-Gal	Single high corner post	470	250×250×16	48
YGP-P2	Double high corner post	1085	250×250×16	24
YGP-P2-Gal	Double high corner post	1085	250×250×16	24

Stretch Wrap Dispenser SFD series

- ◆ Lightweight, high strength.
- ◆ Comfortable foam padded handle.
- ◆ Teflon coated core for smooth film stretch.
- ◆ Film tension is adjustable.
- ◆ Suitable film width from 11 to 21.5".



Model	SFD
Width (mm/inch)	Fit for 280-546 wrap
Color Finish	Black/Chrome
Assembly	Assembled
Construction	Steel

Flexible Conveyor PR / SR series

- ◆ Provide flexible mobile handling facilities.
- ◆ Move goods quickly, safely and efficiently, then close for storage.
- ◆ Versatile conveyor system that can be expanded to suit most locations.
- ◆ Height adjustable range: a.700-900mm b. 800-1000mm c. 900-1150mm
- ◆ Pitch: Closed 32mm, extended 150mm.



Model	Plastic Wheel	PR4313	PR4417	PR4522	PR4626	PR5313	PR5417
	Steel Wheel	SR4313	SR4417	SR4522	SR4626	SR5313	SR5417
Track Width (mm/inch)		450 / 17 ³ / ₄	450 / 17 ³ / ₄	450 / 17 ³ / ₄	450 / 17 ³ / ₄	500 / 20	500 / 20
Wheel Per Spindle		6	6	6	6	8	8
No. of Section		3	4	5	6	3	4
Length Closed/Extendeda (mm/inch)		1668-3642 / 42-143 ³ / ₈	1368-4734 / 54-186 ³ / ₈	1668-5826 / 65 ³ / ₄ -229	1968-6918 / 77 ¹ / ₂ -272	1068-3642 / 42-143 ³ / ₈	1368-4734 / 54-186 ³ / ₈
Loading of Section (kg/lbs)		70 / 154	70 / 154	70 / 154	70 / 154	70 / 154	70 / 154

Model	Plastic Wheel	PR5522	PR4417	PR4522	PR4626	PR5313	PR5417
	Steel Wheel	SR5522	SR4417	SR4522	SR4626	SR5313	SR5417
Track Width (mm/inch)		500 / 20	500 / 20	600 / 23 ⁵ / ₈	600 / 23 ⁵ / ₈	600 / 23 ⁵ / ₈	600 / 23 ⁵ / ₈
Wheel Per Spindle		8	8	8	8	8	8
No. of Section		5	6	3	4	5	6
Length Closed/Extendeda (mm/inch)		1668-5826 / 65 ³ / ₄ -229	1968-6918 / 77 ¹ / ₂ -272	1068-3642 / 42-143 ³ / ₈	1368-4734 / 54-186 ³ / ₈	1668-5826 / 65 ³ / ₄ -229	1968-6918 / 77 ¹ / ₂ -272
Loading of Section (kg/lbs)		70 / 154	70 / 154	70 / 154	70 / 154	70 / 154	70 / 154