



High Lift Scissor Truck **HLT / DGB** series



DGB



HLT



Model	HLT1-540	HLT1-680	DGB1-540	DGB1-680
Type	Manual	Manual	Electric	Electric
Capacity	(kg) 1000	1000	1000	1000
Min. Fork Height	(mm) 85	85	85	800
Max. Fork Height	(mm) 800	800	800	800
Fork Size	(mm) 540x1170	680x1170	540x1170	680x1170
Front Load Roller	(mm) Ø75x50	Ø75x50	Ø75x50	Ø75x50
Steering Wheel	(mm) Ø180x50	Ø180x50	Ø180x50	Ø180x50
Lifting Time,without/with Rated Load	(sec) -	-	15/25	15/25
Battery	(Ah/V) -	-	50/12	50/12
Battery Charger	-	-	Built-in 8A/12V	Built-in 8A/12V
Net Weight	(kg) 109	112	134	137

High Lift Scissor Truck **HPT** series



HPT-M



HPT-E

Model	HPT5410M	HPT6810M	HPT5415M	HPT6815M	HPT5410E	HPT6810E	HPT5415E	HPT6815E
Type	Manual				Electric			
Capacity	(kg) 1000	1000	1500	1500	1000	1000	1500	1500
Fork L×W	(mm) 1150×160	1150×160						
Fork Overall Width	(mm) 540	680	540	680	540	680	540	680
Min. Height	(mm) 85 (75)	85 (75)						
Max. Height	(mm) 800	800						
Battery	(Ah/V) -	75/12						
Charger	(A/V) -	10/12						
Weight	(kg) 118	125	128	135	155	160	160	165



High Lift Scissor Truck **HPTL** series



Automatically Scissor Truck HPTL-S

- ◆ Two infrared sensors.
- ◆ Fork height automatically adjusted.
- ◆ Machine raised while switch turn on, as both infrared sensors detect stopper, Fork lowering automatically.
- ◆ Either of infrared sensors detect stopper, Fork stopped automatically.



HPTL-M



HPTL-E



Automatically Scissor Truck

Model	HPTL5410M	HPTL6810M	HPTL5410E	HPTL6810E
Type	Manual	Manual	Electric	Electric
Capacity	(kg) 1000	1000	1000	1000
Fork Length	(mm) 1500/1800/2000	1500/1800/2000	1500/1800/2000	1500/1800/2000
Fork Overall Width	(mm) 540	680	540	680
Min. Height	(mm) 90	90	90	90
Max. Height	(mm) 800	800	800	800
Battery	(Ah/V) -	-	75/12	75/12
Charger	(A/V) -	-	10/12	10/12

High Lift Scissor Truck **JL / JE** series

◆ Manual

- ◆ Extremely easy to pump and light make this unit very suitable as combined hand pallet truck and lift table.
- ◆ Front support legs and adjustable stabilizers extended to the floor automatically when the forks reach a height of 420mm, to ensure maximum stability and optimum braking.
- ◆ Ergonomic warm handle offers you simple and comfortable operation.
- ◆ Heavy duty design: 4mm steel plate fork frame and larger lift piston ensure the truck to reach rated capacity.
- ◆ Conforms to EN1757-4 and EN1175.

◆ Electric

- ◆ Quick-lift as standard with automatic transfer to normal lifting with loads over 150kg.
- ◆ Automatic descending speed control by a uniquely hydraulic valve,the descending speed always keeps same regardless the truck with or without load. It will prevent cargo damage from fast descending.



Ergonomic handle



Front support legs


High Quality Pump!



JE5210



JL5210

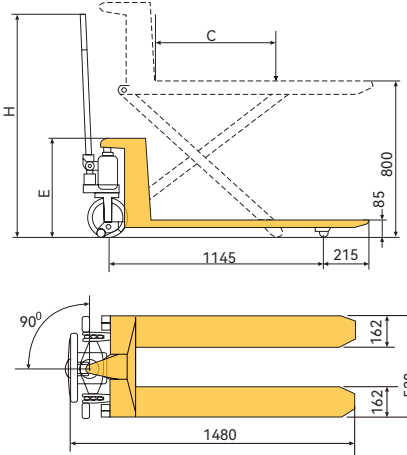

Model	JL5210	JL6810	JL5215	JL6815	JE5210	JE6810	JE5215	JE6815
Capacity	(kg) 1000	1000	1500	1500	1000	1000	1500	1500
Max. Fork Height	(mm) 800	800	800	800	800	800	800	800
Min. Fork Height	(mm) 85	85	85	85	85	85	85	85
Fork Overall Width	(mm) 520	680	520	680	520	680	520	680
Fork Length	(mm) 1140	1140	1100	1100	1140	1140	1100	1100
Dimension	C	(mm) 600	600	560	560	600	600	600
	E	(mm) 530	530	530	530	530	530	530
	H	(mm) 1250	1250	1250	1250	1250	1250	1250
Battery	(Ah/V) -	-	-	-	70/12	70/12	70/12	70/12
Battery Charger	(A/V) -	-	-	-	10/12	10/12	10/12	10/12
Net Weight	(kg) 105	112	118	125	140	147	149	157