

## DC Linear Actuator Scissor Lift Table **YL-LA** series


- ◆ Mechanical-electric lift table.
- ◆ No oil leaks. No hydraulic lift.
- ◆ Maximum starting frequency 10 times per minute.
- ◆ Built-in charger. Compact, space-saving.
- ◆ With 4 swivel mute casters.
- ◆ High strength plastic wheel carrier.
- ◆ Quiet operation.



Model	YL-LA100D-01	YL-LA100D-02	YL-LA150D-01	YL-LA150D-02	YL-LA250-01	YL-LA250-02
Capacity (kg)	100	100	150	150	250	250
Table Size (mm)	800×500	910×610	800×500	910×610	800×500	910×610
Min. / Max. Table Height (mm)	410/1280	410/1280	410/1280	410/1280	355/830	355/830
Battery	24DC-12Ah	24DC-12Ah	24DC-12Ah	24DC-12Ah	24DC-12Ah	24DC-12Ah
Lifting Time without Load (s)	28-32	28-32	36-40	36-40	30-34	30-34
Lowering Time without load (s)	24-28	24-28	34-38	34-38	30-34	30-34
Lifting Time with Rates Load (s)	36-40	36-40	57-61	57-61	45-49	45-49
Lowering Time with Rates Load (s)	24-28	24-28	34-38	34-38	30-34	30-34
Max. Working Current	6A	6A	8A	8A	5.5A	5.5A
Charger	24V-DC-2A	24V-DC-2A	24V-DC-2A	24V-DC-2A	24V-DC-2A	24V-DC-2A
Working Cycle / Chartered	130	130	70	70	140	140
Max. Linear actuator force (N)	8000	8000	10000	10000	8000	8000
Castor Wheel	4 Pcs Mute Castor wheels TPR Bracket 5" TDR wheels					
Overall Dimension L×W×H (mm)	890×500×992	1000×610×992	890×500×992	1000×610×992	890×500×992	1000×610×992
Net Weight (kg)	79	82	80	83	64	67

## Transfer Lift Table **BT / BE** series

- ◆ More easier for loading and unloading operations by means of ball transfer unit.
- ◆ Electric : 800W DC power pack made in Korean.

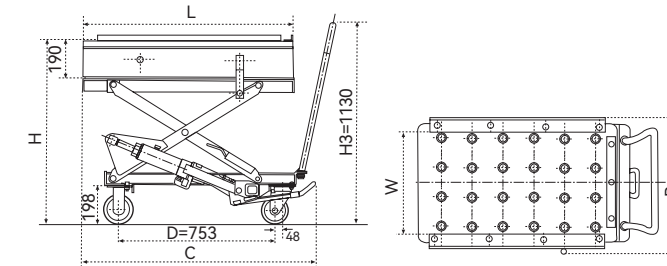

Model	BT20	BT45	BT70	BT100	BE45	BE70	BE100	BE45L
Type	Manual				Electric			
Capacity (kg)	200	450	700	1000	450	700	1000	450
Table Size L×W (mm)	820×500	550×1006	550×1006	550×1006	550×1006	550×1006	550×1006	672×1516
Table Height H Min./H Max. (mm)	520/1000	632/1185	632/1150	647/1140	640/1140	670/1140	670/1140	619/1329
Handle Height H3 (mm)	1100	1130	1130	1130	1130	1130	1130	1130
Wheel Dia. (mm)	Ø125	Ø150	Ø150	Ø150	Ø150	Ø150	Ø150	Ø150
Overall Size B×C (mm)	560×1010	580×1185	580×1260	580×1260	580×1185	580×1260	580×1260	672×1780
Stroke to Max. Height (s)	30	65	75	75	-	-	-	-
Lifting Speed (s)	-	-	-	-	15	15	15	15
Net Weight (kg)	105	153	155	172	183	169	204	273

## Spring Lift Table **BC** series

- ◆ Self-leveling, fully adjustable, weight sensitive!
- ◆ Designed to maintain an ideal working height for assembly lines and loading/unloading operations.
- ◆ Balance to achieved by double springs fitted to the shock absorbers.
- ◆ Simple to operate spring tension adjustment.



Model	BC21	BC40
Capacity (kg)	210	400
Loading Range (kg)	80-210	100-400
Table Size L×W (mm)	830×500	1010×520
Table Height (Min./Max.) (mm)	360/770	440/800
Handle Height (mm)	1100	1100
Wheel Dia. (mm)	Ø125	Ø125
Overall Size (mm)	1065×500×1100	1200×500×1100
Net Weight (kg)	75	123