


Stationary Foot Pump Scissor Table **FBX** series

- ◆ Heavy duty range.
- ◆ New design to meet norm EN1570:1999.
- ◆ Foot operated.

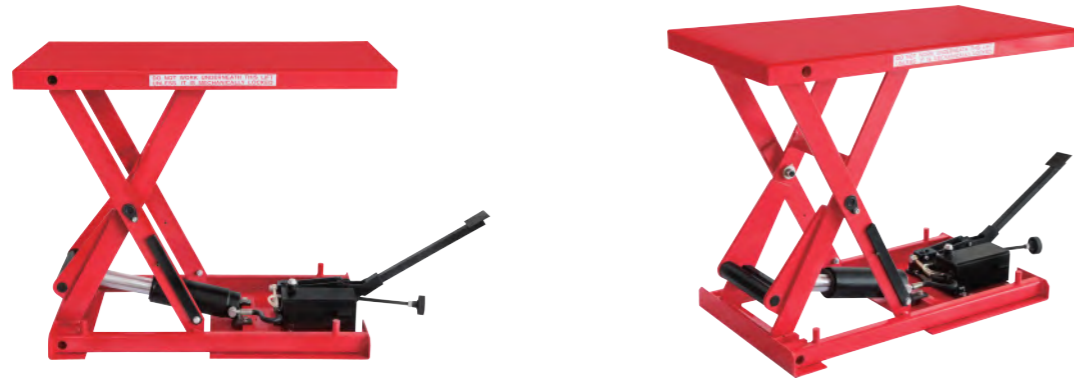

Model		FBX15	FBX20	FBX25	FBX30D	FBX50	FBX80	FBX100
Capacity	(kg)	150	200	250	300	500	800	1000
Table Size	L×W (mm)	700×450	700×500	830×500	1010×520	1010×520	1010×520	1010×520
Table Height	H(Min./Max.) (mm)	127/533	150/711	150/711	240/1375	150/800	150/800	160/800
Overall Size	(mm)	730×450	730×500	850×500	1030×520	1030×520	1030×520	1030×520
Foot Pedal to Max. Height		30	40	47	55	70	70	80

Self-Propelled Lift Table **STL** series (Battery Powered)

- ◆ Heavy duty range.
- ◆ New design to meet norm EN1570:1999.
- ◆ Foot operated.



Model		STL2000-1	STL2000-2	STL1200
Capacity	(kg)	2000	2000	1200
Platform Size	L1×W (mm)	1500×1000	1500×1500	1300×820
Platform Min. Height	h1 (mm)	550	550	400
Platform Max. Height	h2 (mm)	1700	1700	1700
Lifting Time(unload)	(s)	18	18	18
Lower Time(unload)	(s)	30	30	30
Lifting Time(loaded)	(s)	20	20	20
Lower Time(loaded)	(s)	26	26	26
Overall Size	L×W×H (mm)	2070×1000×1265	2070×1500×1265	1870×820×1265
Driving Electric Currency(unload/load)	(A)		8.1 / <20	
Powerpack Electric Currency(unload/load)	(A)		21-22 / 52-63	
Travelling Speed(unload/load)	(m/s)		0.9 / 0.82	
Driving Motor	(KW)		0.8 permanent magnet	
Battery	(V/Ah)		48/45	
Net Weight	(kg)	555	608	500


Linear Actuator Scissor Lift Table **ELT** series

- ◆ Adopting electric Motor-driven push-rod instead of hydraulic, more precise positioning, without hydraulic problems.
- ◆ With transformer 220V to 24V.



Model		ELT100	ELT150A	ELT200A	ELT250A
Capacity	(kg)	100	150	200	250
Platform Size	(mm)	700×400	850×400	910×610	910×610
Raised Height	(mm)	125	160	355	355
Lowered Height	(mm)	500	650	830	830
Lifting Time(loaded)	(s)	20-25	20-25	20-25	20-25
Lower Time(unload)	(s)	20	20	20	20
Net Weight	(kg)	40	25	52	67
Power Type		DC	AC	AC	AC

AC Linear Actuator Scissor Lift Table **E-HW** series

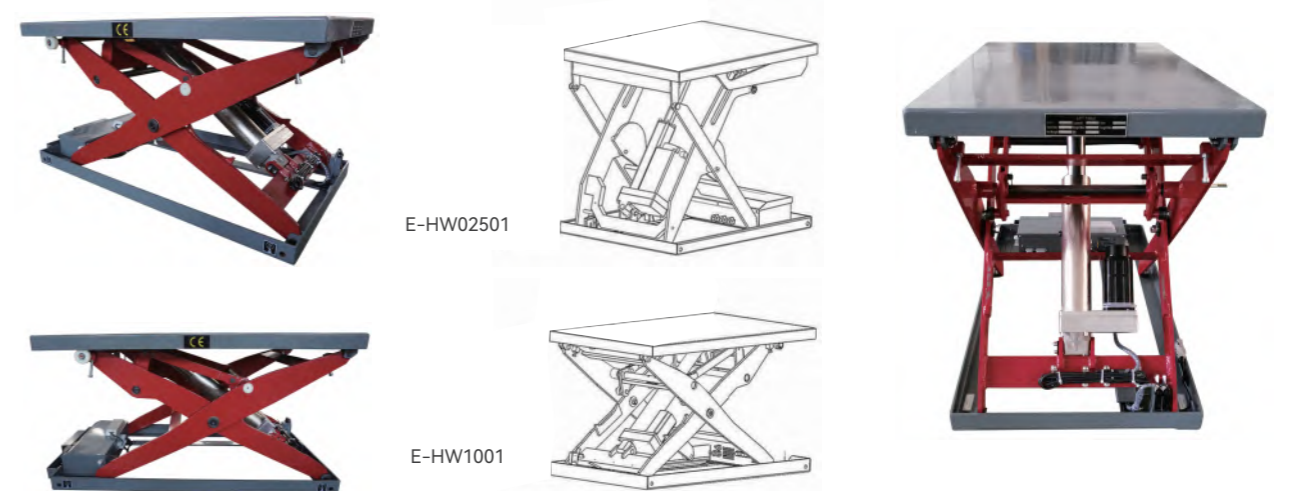

Model		E-HW02501	E-HW0501	E-HW1001
Capacity	(kg)	250	500	1000
Min. Table Height	(mm)	160	180	180
Max. Table Height	(mm)	650	885	885
Platform Size	(mm)	715×540	1200×700	1200×750
Lifting Time	(s)	15-20	15-20	15-20
Lowering Time	(s)	15-20	15-20	15-20
Electric Actuator		3-380V-0.75kw	3-380V-1.1kw	3-380V-2.2kw